

AERODROME CHART



ATIS 127.45
 TWR 118.1(124.3)
 GND 121.9
 Delivery 121.675(DCL AVBL)

ZYTX SHENYANG/Taoxian

N41° 38.5'E123° 29.1' ELEV 61m

RWY	Direction	Bearing strength (PCN)	
06	056°	TWY A	95/F/B/W/T
		RWY; TWYs C,D,F,R:	82/F/B/W/T
		TWYs P1-P3,P:	80/R/B/W/T
		TWY E:	75/F/B/W/T
		TWY H:	72/R/B/W/T
24	236°	TWYs M(north of T),N(north of T),P(north of T),T(stands Nr.Y21-Y27):	71/R/B/W/T
		TWYs J,K:	64/R/B/W/T
		TWYs G,T(stands Nr.Y01-Y20):	62/R/B/W/T
		TWY B:	38/R/B/W/T
		TWY Z:	58/R/B/W/T

BEARINGS ARE MAGNETIC
 ALTITUDES, DISTANCES,
 ELEVATIONS AND HEIGHTS
 IN METERS

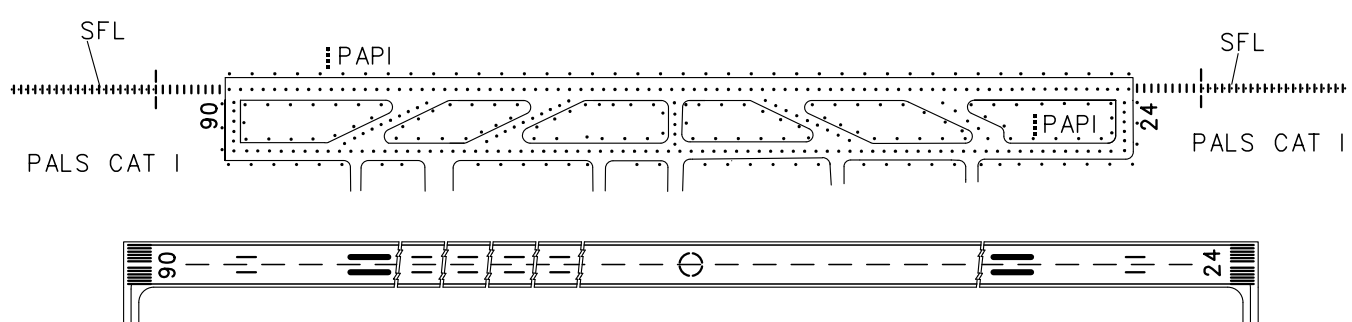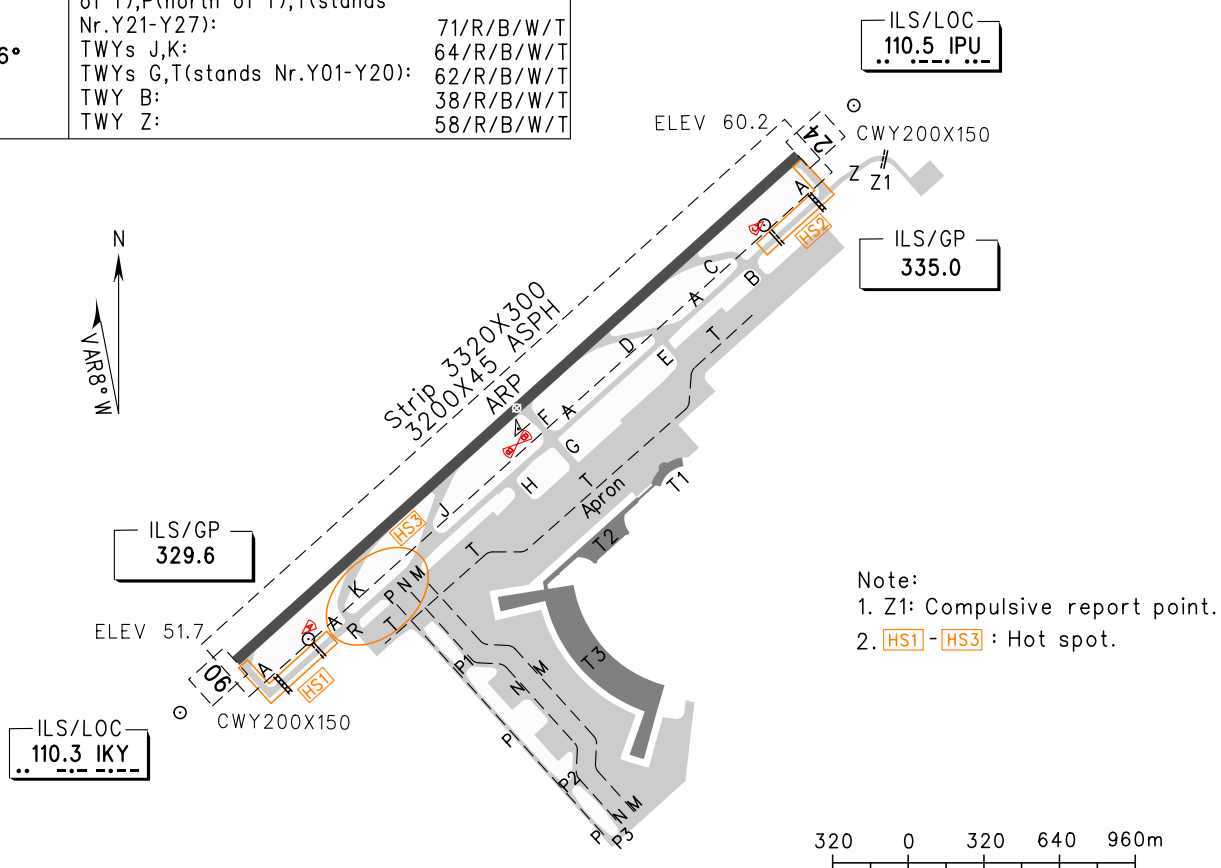

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS			
RWY	ACFT Type			REDL	NIL(Day only)	RWY06	RWY24
06/ 24	A	B	C	RVR400	RVR500	PALS CAT I PAPI REDL RCLL SFL	PALS CAT I PAPI REDL RCLL SFL
	2 TURB ENG or 3&4 ENG						
	Other			VIS1600			

Changes: RVR.